




## Stainless steel bearing equipment Co....

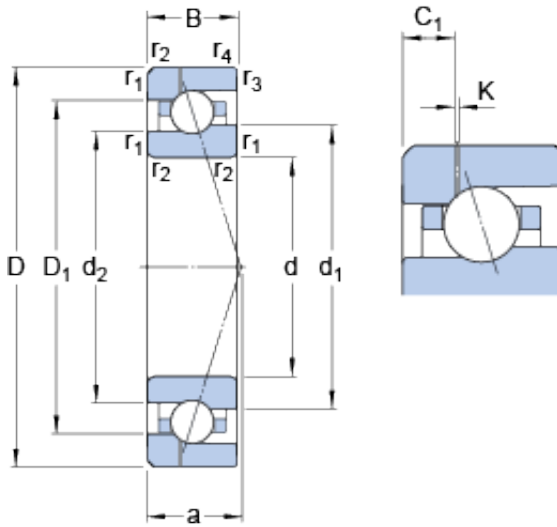

### 30 mm x 55 mm x 13 mm SKF 7006 CE/HCP4AH1 angular contact ball bearings

Bearing No. 7006 CE/HCP4AH1

7006 CE/HCP4AH1 Bearing 2D drawings and 3D CAD models

Size	55x30x13 mm
Bore Diameter	55 mm
Outer Diameter	30 mm
Width	13 mm
d	30 mm
D	55 mm
B	13 mm
d <sub>1</sub>	38.2 mm
d <sub>2</sub>	36.4 mm
D <sub>1</sub>	45.81 mm
K	0.5 mm
C <sub>1</sub>	4.23 mm
r <sub>1,2</sub> - min.	1 mm
r <sub>3,4</sub> - min.	0.6 mm
a	12.2 mm
d <sub>a</sub> - min.	34.6 mm
d <sub>b</sub> - min.	34.6 mm
D <sub>a</sub> - max.	50.4 mm
D <sub>b</sub> - max.	50.8 mm
r <sub>a</sub> - max.	1 mm
r <sub>b</sub> - max.	0.6 mm
d <sub>n</sub>	39.9 mm
Basic dynamic load rating - C	9.4 kN
Basic static load rating - C <sub>0</sub>	5.2 kN



## Stainless steel bearing equipment Co....

Fatigue load limit - $P_u$	0.22 kN
Limiting speed for grease lubrication	47000 r/min
Limiting speed for oil lubrication	73000 mm/min
Ball - $D_w$	6.35 mm
Ball - $z$	17
$G_{ref}$	1.7 cm <sup>3</sup>
Calculation factor - $f_0$	7.9
Preload class A - $G_A$	50 N
Preload class B - $G_B$	150 N
Preload class C - $G_C$	300 N
Calculation factor - $f$	1.05
Calculation factor - $f$	1
Calculation factor - $f_{2A}$	1
Calculation factor - $f_{2B}$	1.03
Calculation factor - $f_{2C}$	1.05
Calculation factor - $f_{HC}$	1.01
Preload class A	31 N/micron
Preload class B	49 N/micron
Preload class C	67 N/micron
$d_1$	38.2 mm
$d_2$	36.4 mm
$D_1$	45.81 mm
$C_1$	4.23 mm
$r_{1,2}$ min.	1 mm
$r_{3,4}$ min.	0.6 mm
$d_a$ min.	34.6 mm
$d_b$ min.	34.6 mm
$D_a$ max.	50.4 mm
$D_b$ max.	50.8 mm



## Stainless steel bearing equipment Co....

$r_a$ max.	1 mm
$r_b$ max.	0.6 mm
$d_n$	39.9 mm
Basic dynamic load rating C	9.36 kN
Basic static load rating $C_0$	5.2 kN
Fatigue load limit $P_u$	0.22 kN
Attainable speed for grease lubrication	47000 r/min
Attainable speed for oil-air lubrication	73000 r/min
Ball diameter $D_w$	6.35 mm
Number of balls z	17
Reference grease quantity $G_{ref}$	1.7 cm <sup>3</sup>
Preload class A $G_A$	50 N
Static axial stiffness, preload class A	31 N/ $\mu$ m
Preload class B $G_B$	150 N
Static axial stiffness, preload class B	49 N/ $\mu$ m
Preload class C $G_C$	300 N
Static axial stiffness, preload class C	67 N/ $\mu$ m
Calculation factor f	1.05
Calculation factor $f_1$	1
Calculation factor $f_{2A}$	1
Calculation factor $f_{2B}$	1.03
Calculation factor $f_{2C}$	1.05
Calculation factor $f_{HC}$	1.01
Calculation factor $f_0$	7.9
Mass bearing	0.1 kg